


SP 800 i+

SUPERIAL 800 i+

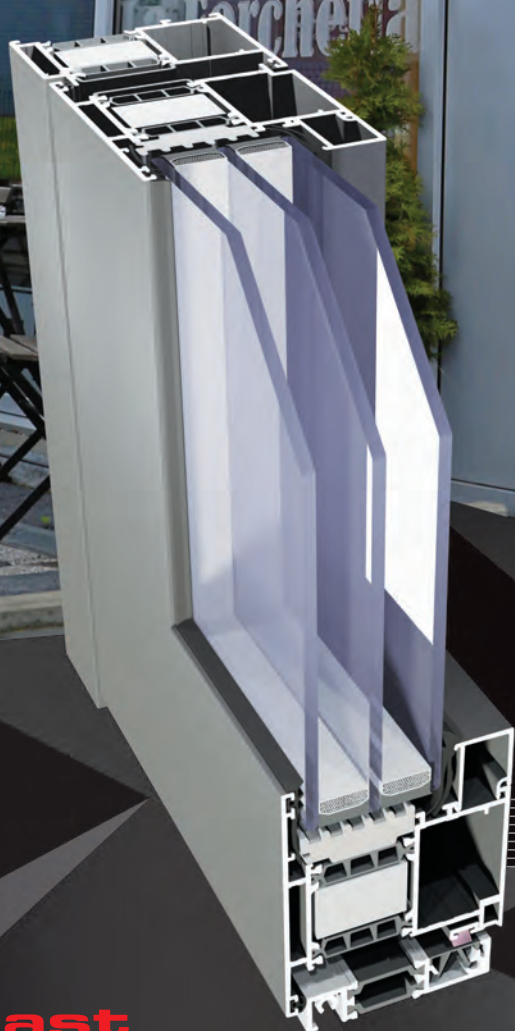

A door system designed for doors with high thermal insulation parameters.

SP 800 i+

A door system designed for doors with high thermal insulation parameters.

The system is compatible with system the Superial system - thanks to adaptive profiles designs in series SP 800 can be integrated with Superial shop windows.

The system features very good anti-burglary properties (the lock is situated far from the outer side).


A thermal insulation threshold is used, which can be disassembled following door installation in the frame.

The option of bending profiles (detailed specification of profiles and detailed technical parameters of a profile bending process are available in the customer area of the website www.aliplast.pl).


System SP800 is also available in the variant with improved thermal insulation power (SP 800 i, SP 800 i+), which was achieved by applying special thermal inserts slid between thermal separators and around the glass pane. Such a solution improves the insulating power of the profile by 0,2 – 0,5 W/m²K.

There is possibility of use Flyscreen system (Flyscreen – fly screens are a practical and an extremely functional protection against insects.)


Wide range of colours available - RAL palette, structural colours, Aliplast Wood Colour Effect, bi-colour.

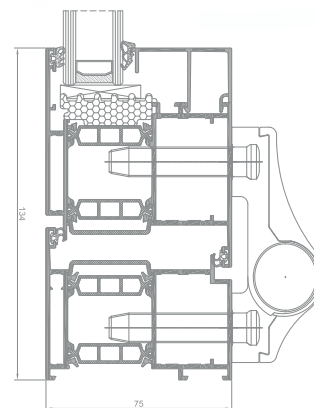

SP 800 i door section

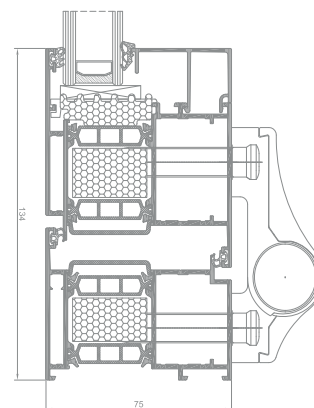

SP 800 i+ door section

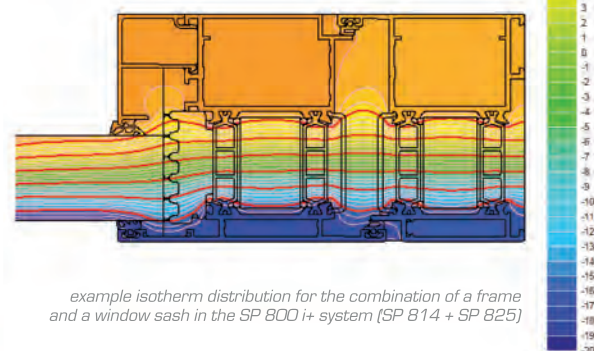

example isotherm distribution for the combination of a frame and a window sash in the SP 800 i+ system (SP 814 + SP 825)

TECHNICAL SPECIFICATION

| SYSTEM | MATERIAL | DEPTH OF FRAME | DEPTH OF LEAF | GLAZING RANGE | TYPE OF WINDOWS | TYPE OF DOORS |
|-----------|----------------------|----------------|---------------|---------------|-----------------|---|
| SP 800 | aluminium / polyamid | 75 mm | 75 mm | 14-61 mm | — | single and double doors, outside opening, inside opening, panic doors |
| SP 800 i+ | aluminium / polyamid | 75 mm | 75 mm | 14-61 mm | — | single and double doors, outside opening, inside opening, panic doors |

PERFORMANCE

| SYSTEM | THERMAL INSULATION Uf * | AIR PERMEABILITY | WINDLOAD RESISTANCE | WATERTIGHTNESS |
|-----------|---------------------------------|-------------------|---------------------|--------------------|
| SP 800 | Uf from 1,61 W/m ² K | Class 4; EN 12207 | 2400 Pa; EN 12210 | Class 8A; EN 12208 |
| SP 800 i+ | Uf from 1,36 W/m ² K | Class 4; EN 12207 | 2400 Pa; EN 12210 | Class 8A; EN 12208 |

* Thermal insulation is dependent on a combination of profiles and thickness of the filling.